


GT - BSLP 3.5 - 4.5 - 5.5



Low profile electrohydraulic scissor lift - antiknock valve - lifting height: 220-1880mm - pneumatic release with safety lock - 3 cylinders per platform - Standard engine power 3,0 KW/400V/3PH/50Hz. Required pneumatic connection for safe release 6/8 bar. (VERSION ON FLOOR)

Sollevatore a forbice elettro-idraulico per assetto a basso profilo - valvola paracadute - altezza di sollevamento 220 - 1880mm - sicure a sgancio pneumatico - 3 cilindri per pedana - potenza motore 3.0KW - 400V/3PH/50Hz. Richiesta connessione pneumatica per lo sgancio delle sicure 6/8 bar. (VERSIONE A PAVIMENTO)

MODEL	LIFT CAPACITY	PLATFORM (mm)	LT CAPACITY	DESCRIPTION
GT-BSLP 3.5 A	3.5 T	4200 x 680	3.5 T	Lift Table with lifting height of 450mm - lifting capacity 3500Kg - front recess lenght 870mm (4200X680) - sliding plates 1320mm - movable rear cover - safety lock with pneumatic release - 2 front cylinders - 1 rear cylinder - lift table with mechanical safety lock - engine power 3.0Kw - 400v/50Hz/3ph Lift table con altezza sollevamento 450mm - incavo anteriore lunghezza 870mm (4200X680) - piani oscillanti 1320mm - sicura con sgancio pneumatico - 2 cilindri anteriori - 1 cilindro posteriore sicura meccanica della torretta 3.0Kw - 400v/50Hz/3ph
GT-BSLP 4.5 A	4.5 T	4600 x 700	4.5T	Lift Table with lifting height of 450mm - lifting capacity 4500Kg - front recess lenght 1070 (4600x700) - sliding plates 1520mm - movable rear cover - safety lock with pneumatic release - 2 front cylinders - 1 rear cylinder - Lift Table with mechanical safety lock - engine power 3.0Kw - 400v/50Hz/3ph Lift table con altezza sollevamento 450mm portata 4500kg -incavo anteriore lunghezza 1070 (46000 X 700) - piani oscillanti - 1520mm - sicura con sgancio pneumatico- 2 cilindri anteriori - 1 cilindro posteriore sicura meccanica della torretta 3.0Kw - 400v/50Hz/3ph
GT-BSLP 5.5 A	5.5 T	5030 x 710	5.5 T	Lift Table with lifting height of 450mm - lifting capacity 5500Kg - front recess lenght 1170 (5030x710) - sliding plates 150mm - movable rear cover - safety lock with pneumatic release - 2 front cylinders - 1 rear cylinder - Lift Table with mechanical safety lock - engine power 3.0Kw - 400v/50Hz/3ph Lift table con altezza sollevamento 450mm portata 5500kg -incavo anteriore lunghezza 1170 (5030 X 710) - piani oscillanti - 1850mm - sicura con sgancio pneumatico- 2 cilindri anteriori - 1 cilindro posteriore sicura meccanica della torretta 3.0Kw - 400v/50Hz/3ph



Rolling jack rail width=34mm, the width here does not include the guide rail width.

Rolling jack rail larghezza = 34mm, la larghezza qui non include la larghezza della guida.



ROLLING JACK RAILS STANDARD - CORSIE ROLLING JACK DTANDARD

3.500

Kg

4.500

Kg

5.500


Kg

OPTIONAL

CODE	DESCRIPTION
B-93013	LED lamps 24 Volt - Set 4 lampade 24 Volt LED
B-93014	Expansion bolts set (12 pz) - Set tasselli di fissaggio (12pz)
B-93025	Turning plates set with covers - Set piatti rotanti con copertura
B-93021	Wires-pipes extension set L= +1 m - Set estensioni tubi-cavi L= +1 m
B-93022	Wires-pipes extension set L= +2 m - Set estensioni tubi-cavi L= +2 m
B-93023	Wires-pipes extension set L= +3 m - Set estensioni tubi-cavi L= +3 m
A-93019	Set rubber pad H= 60 mm (4 pz) - Set tamponi H= 60 mm (4 pz)
A-93020	Set rubber pad H= 120 mm (4 pz) - Set tamponi H= 120 mm (4 pz)
A-93039	Rubber ramps H=30mm - Rampe in gomma H=30mm
A-93040	Rubber ramps H=50mm - Rampe in gomma H=50mm



STANDARD
LIFT TABLE WITH 2 EXTENSION
LIFT TABLE CON 2 ESTENSIONE

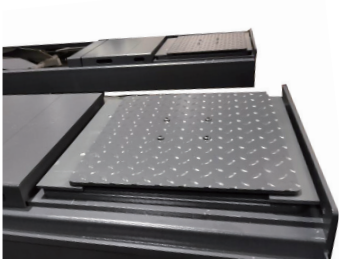

HYDRAULIC PLAY DETECTOR
DETECTORE DI GIOCO IDRAULICO

OPTIONAL




RUBBER RAMPS H=30/50mm
RAMPA IN GOMMA H=30/50mm

OPTIONAL



3 CYLINDER PER PLATFORM
TRE CILINDRI PER PEDANA

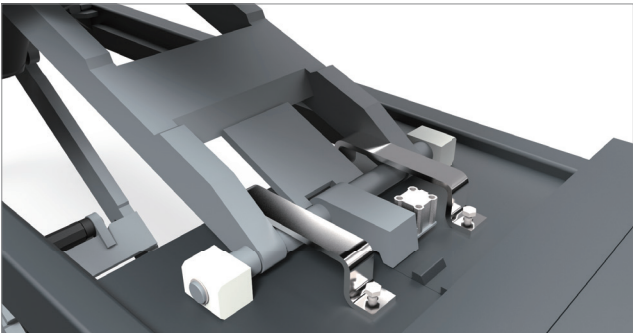

MECHANICAL SAFETY LOCK
SICURA MECCANICA

All models are provided with 4 rubber On request all platforms can be provided with sliding plates - turning plates - HPD - lift table with 1 extension - lift table with 2 extensions. All our product are supplied with sandblasting.


STANDARD COLOURS: GREY RAL 7016 - GREY RAL 7040

Tutti i modelli vengono forniti con 4 tamponi in gomma. A richiesta tutte le pedane possono ospitare piani oscillanti, piatti rotanti - torretta con 1 estensione - torretta con 2 estensioni. Su tutti i ponti viene applicato il trattamento di sabbiatura.

COLORI STANDARD: GRIGIO RAL 7016 - GRIGIO RAL 7040

GT - BSLP 3.5 - 4.5 - 5.5



3.500 Kg 4.500 Kg 5.500 Kg

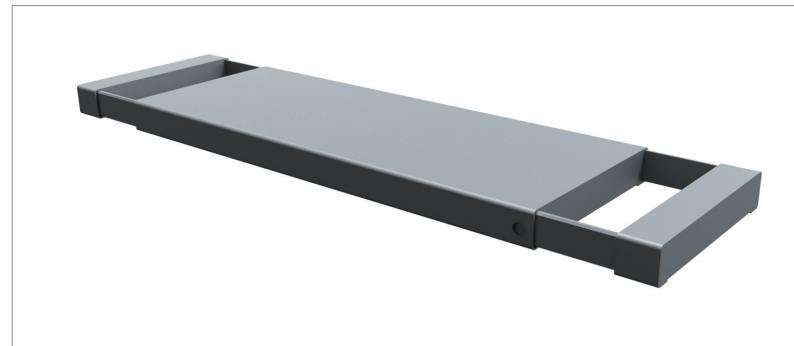

LIFT TABLE WITH 2 EXTENSION
LIFT TABLE CON 2 ESTENSIONE



ROLLING JACK 2T / 3 T
ROLLING JACK 2T / 3T
OPTIONAL

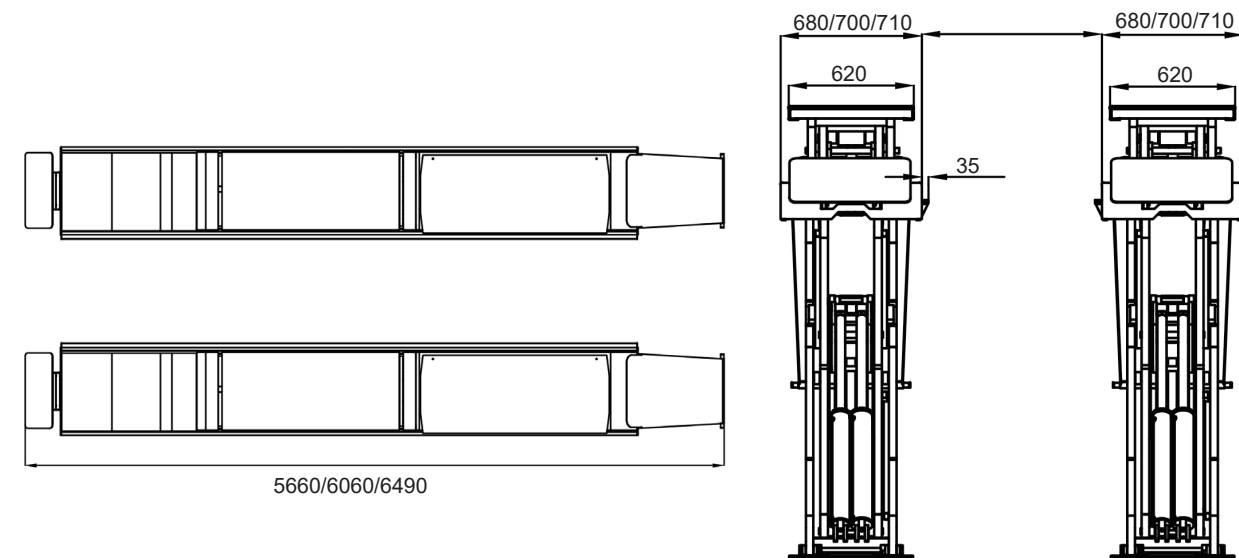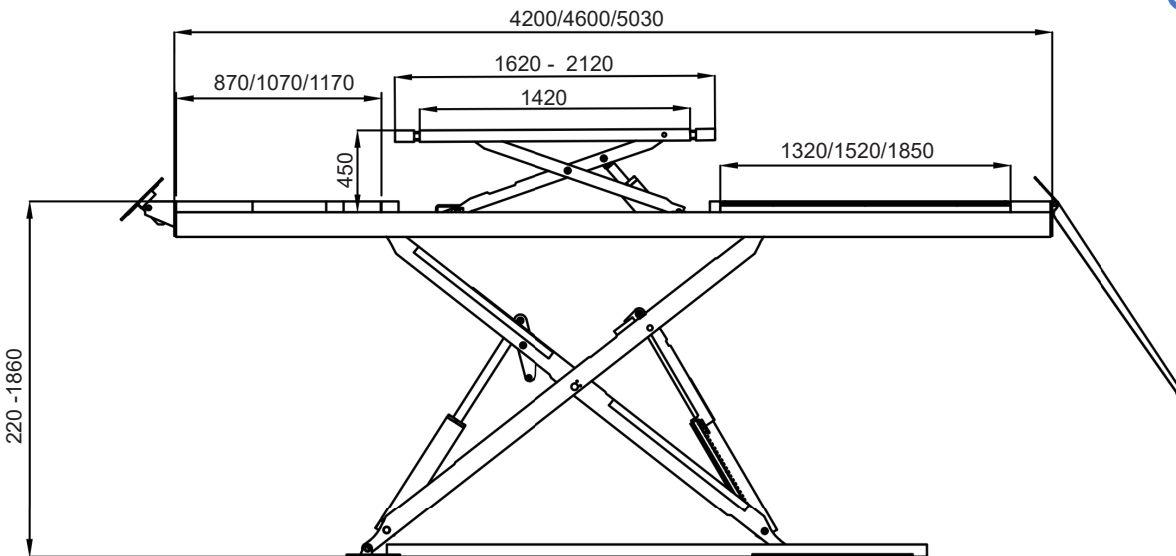

GT - BSLP

- 1 MOBILE COVERS
COPERTURE MOBILI
- 2 STANDARD LIFT TABLE
LIFT TABLE
- 3 APPROACHING RAMPS
RAMPE SALITA
- 4 SLADING PLATES
PIANI OSCILLANTI
- 5 ASSISTANT CYLINDER WITH MECHANICAL SAFETY LOCK
CILINDRO DI ASSISTENZA CON SICURA MECCANICA
- 6 DOUBLE CYLINDER MASTER/SLAVE
DOPPIO CILINDRO MASTER/SLAVE
- 7 LIFT TABLE WITH MECHANICAL SAFETY LOCK WITH PNEUMATIC RELEASE
LIFT TABLE CON SICURA MECCANICA A SGANCIO PNEUMATICO

